


# RESILIENT-SEATED GATE VALVE(DIN3352 F4)

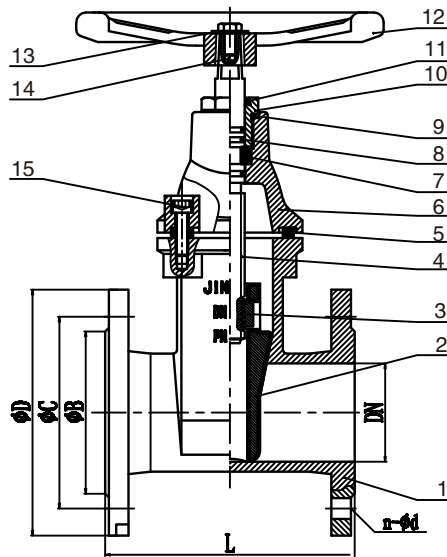

### ◆ Material of Structure

No.	Part	pcs	Material
1	Body	1	QT500-7
2	Wedge	1	QT500-7/EPDM
3	Stem nut	1	ZCuZn38Mn2Pb2
4	Stem	1	2Cr13
5	Gasket	1	EPDM
6	Bonnet	1	QT500-7
7	Locating Ring	1	Hpb 59-1
8	O Ring II	1	EPDM
9	O Ring I	3	EPDM
10	Sealing nut	1	ZCuZn38
11	Lining Bush	1	EPDM
12	Handwheel	1	Q235
13	Washer	1	2Cr13
14	Hexagon bolt II	1	2Cr13
15	Hexagon bolt I	8	35CrMoA

### ◆ Description :

- 1.Conforms to DIN 3352
- 2.Face to face dimensions conforms to F4 of DIN3302
- 3.Flanges drilled conforms to DIN2532/DN2533
- 4.Suitable media:water/oil/gas

### ◆ Dimensions

F-V003-0050	DN	EN 1902-2 PN10				F-V003-6050	DN	EN 1902-2 PN16				DIN3352-F 4	
		ΦD	ΦC	ΦB	n-Φd			ΦD-	ΦC	n ΦB	Φd	L	H
F-V003-0050	50	165	125	99	4-Φ19	F-V003-6050	50	165	125	99	4-Φ19	150	270
F-V003-0065	65	185	145	118	4-Φ19	F-V002-6065	65	185	145	118	4-Φ19	170	290
F-V003-0080	80	200	160	132	8-Φ19	F-V002-6080	80	200	160	132	8-Φ19	180	320
F-V003-0100	100	220	180	156	8-Φ19	F-V002-6100	100	220	180	156	8-Φ19	190	350
F-V003-0125	125	250	210	184	8-Φ19	F-V002-6125	125	250	210	184	8-Φ19	200	450
F-V003-0150	150	285	240	211	8-Φ23	F-V002-6150	150	285	240	211	8-Φ23	210	470
F-V003-0200	200	340	295	266	8-Φ23	F-V002-6200	200	340	295	266	12-Φ23	230	560
F-V003-0250	250	400	350	319	12-Φ23	F-V002-6250	250	400	355	319	12-Φ28	250	640
F-V003-0300	300	455	400	370	12-Φ23	F-V002-6300	300	455	410	370	12-Φ28	270	740
F-V003-0350	350	505	460	429	16-Φ23	F-V002-6350	350	520	470	429	16-Φ28	290	760
F-V003-0400	400	565	515	480	16-Φ28	F-V002-6400	400	580	525	480	16-Φ31	310	850
F-V003-0500	500	670	620	582	20-Φ28	F-V002-6500	500	715	650	609	20-Φ34	350	950
F-V003-0600	600	780	725	682	20-Φ31	F-V002-6600	600	840	770	720	20-Φ37	390	1180