

Deutsche
Qualität
Garantiert



AESOLAR

since 2003



AURORA

HIGH ENERGY YIELD RELIABILITY DURABILITY

30
years
Performance
Warranty

15
years
Product
Warranty

485W-505W AE MD-132 Series

MONO-CRYSTALLINE PV MODULES
HALF-CUT CELLS • MONO-FACIAL

www.ae-solar.com

Ver. 23.12.1



132

HALF
CELLS



182
mm

CELL
SIZE



LID
RESISTANT



PID
RESISTANT



SALT CORROSION
RESISTANT



SAND
RESISTANT




AMMONIA
RESISTANT



HIGHLY STABLE
AND TOUGH



IEC 61215 IEC 61730
Regular Production Surveillance
www.tuv.com
ID 1111251295



AE MD-132 Series 485W-505W



MONO-CRYSTALLINE PV MODULES
HALF-CUT CELLS • MONO-FACIAL

Mechanical and design specification




Cell type	Gallium-doped Mono c-Si PERC, Half-cut cells, 182 mm
No. of cells	132
Front cover	3.2 mm glass, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	White backsheet
Junction box	IP68 rated, 3 Bypass Diodes
Frame	30 mm anodized Aluminium alloy
Cable	1 x 4 mm ² , 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	2094 mm x 1133 mm x 30 mm
Weight	24.5 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa or 244 kg/m ²
Snow load	5400 Pa or 550 kg/m ²

Packaging information

Packaging configuration	36 pcs / pallet
Loading capacity	792 pcs / 40 HQ
Size / Pallet	2125 mm x 1140 mm x 1245 mm
Weight	921 kg / pallet

Temperature ratings

Operating temperature	(°C)	-40 to +85
Temp. coefficient of P _{max}	(%/°C)	-0.35
Temp. coefficient of V _{oc}	(%/°C)	-0.275
Temp. coefficient of I _{sc}	(%/°C)	0.045
Nom. operating temp. NOCT	(°C)	45 ± 2

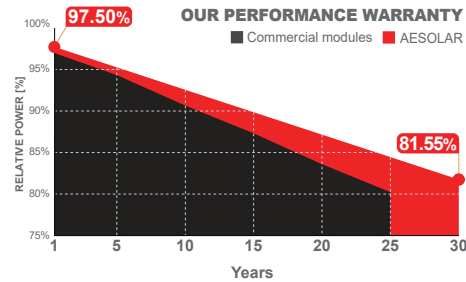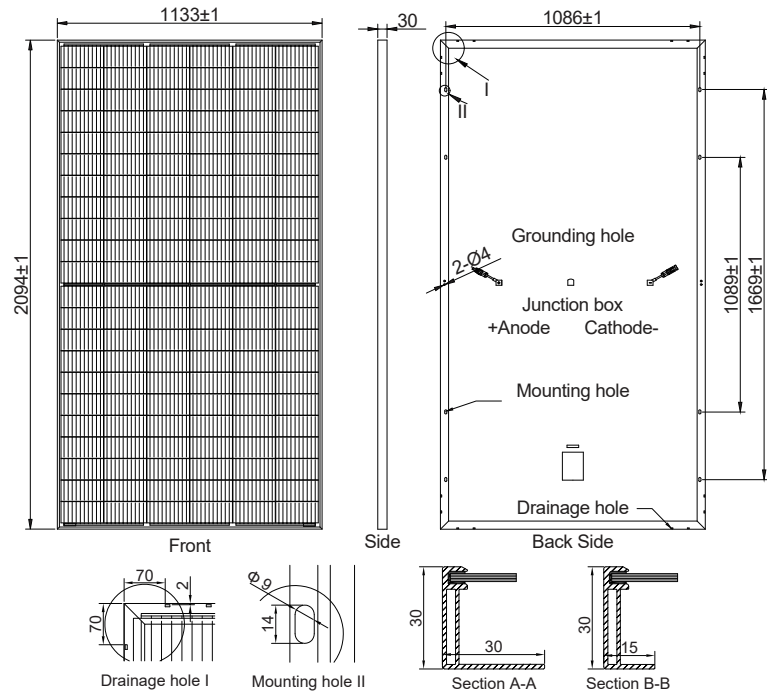

Electrical specifications (STC*):		AE485MD-132	AE490MD-132	AE495MD-132	AE500MD-132	AE505MD-132
Nominal Max. Power	P _{max} (Wp)	485	490	495	500	505
Maximum operating voltage	V _{MPP} (V)	38.31	38.55	38.79	39.03	39.27
Maximum operating current	I _{MPP} (A)	12.66	12.71	12.76	12.81	12.86
Open-circuit voltage	V _{oc} (V)	45.75	46.05	46.34	46.64	46.93
Short-circuit current	I _{sc} (A)	13.42	13.47	13.52	13.57	13.62
Module efficiency	η (%)	20.44	20.65	20.86	21.07	21.29
Power tolerance	(W)			0~+5		
Maximum system Voltage	(V)			1500		
Maximum series fuse rating	(A)			25		

*STC: Standard test conditions (Irradiance 1000 W/m², Cell temperature 25°C and air mass of AM1.5), measurement tolerance P_{max}: ±3%

Electrical specifications (NMOT*):		AE485MD-132	AE490MD-132	AE495MD-132	AE500MD-132	AE505MD-132
Nominal Max. Power	P _{max} (Wp)	363	366	370	373	377
Maximum operating voltage	V _{MPP} (V)	35.80	36.00	36.20	36.40	36.60
Maximum operating current	I _{MPP} (A)	10.13	10.17	10.21	10.25	10.29
Open-circuit voltage	V _{oc} (V)	43.00	43.20	43.40	43.60	43.80
Short-circuit current	I _{sc} (A)	10.74	10.78	10.82	10.86	10.90

*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m², Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.



+216 98 366 669
contact@hydroelec-tn.com
www.hydroelec-tn.com/
Lot 68 Rue Khlidia zone industriel
Mghira lFouchena 2082 Ben arous, Tunis



+49 8231 978268 0
sales@ae-solar.com
www.ae-solar.com

AESOLAR
Messerschmittring 54
86343 Königsbrunn, Germany

